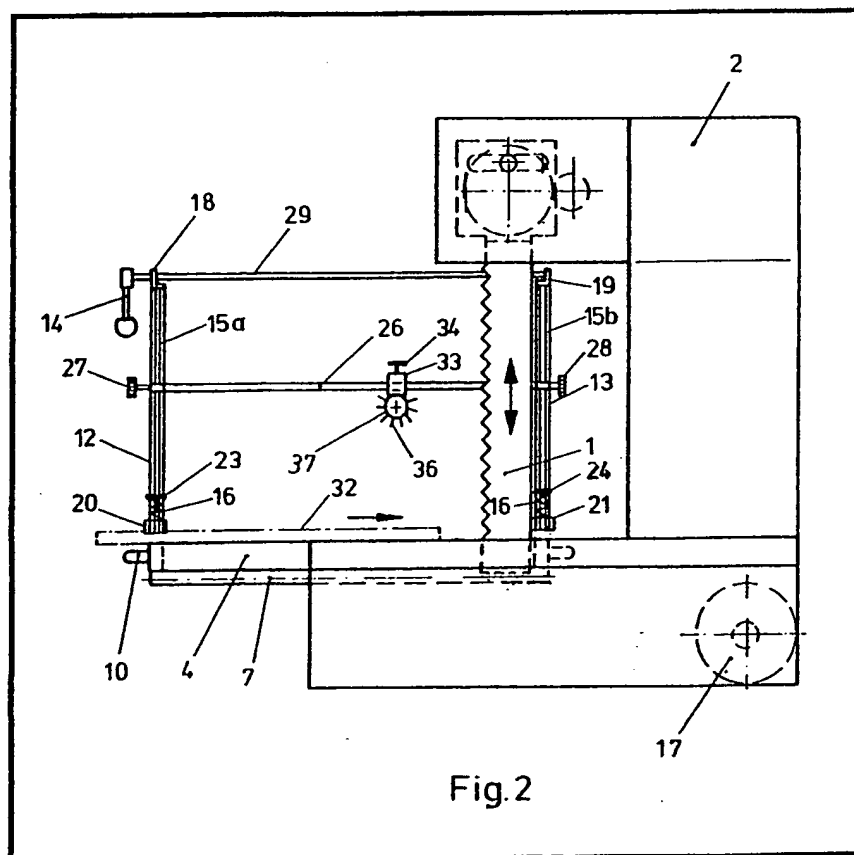


- (21) Application No 8019616
 (22) Date of filing
 16 Jun 1980
 (30) Priority data
 (31) 2925400
 (32) 23 Jun 1979
 (33) Fed Rep of Germany
 (DE)
 (43) Application published
 4 Feb 1981
 (51) INT CL³ B27B 11/10
 (52) Domestic classification
 B5L 104 CP
 (56) Documents cited
 None
 (58) Field of search
 B5L
 (71) Applicant
 Siegfried Gebhart
 Tobelstadel
 7971 Aichstetten
 Federal Republic of
 Germany
 (72) Inventor
 Siegfried Gebhart
 (74) Agents
 Swindell & Pearson

(54) Clamping arrangement for a
 sawing machine

(57) A sawing device has a movable supporting platform (4) for moving the material (32) to be cut to the blade (1). A clamping arrangement for the material comprises a support (12, 13) towards each end of the platform (4), each support having upper and lower crosspieces (18, 19 and 20, 21 respectively). A bar (15a, 15b) extends vertically between each pair of crosspieces and a rail (26) extends between the bars (15a, 15b) to be clamped thereto at a selected position. A torsion bar (29) extends between the upper crosspieces (18, 19) and has eccentric cams (30) engagable with the upper ends of the bars (15a, 15b) for movement thereof.



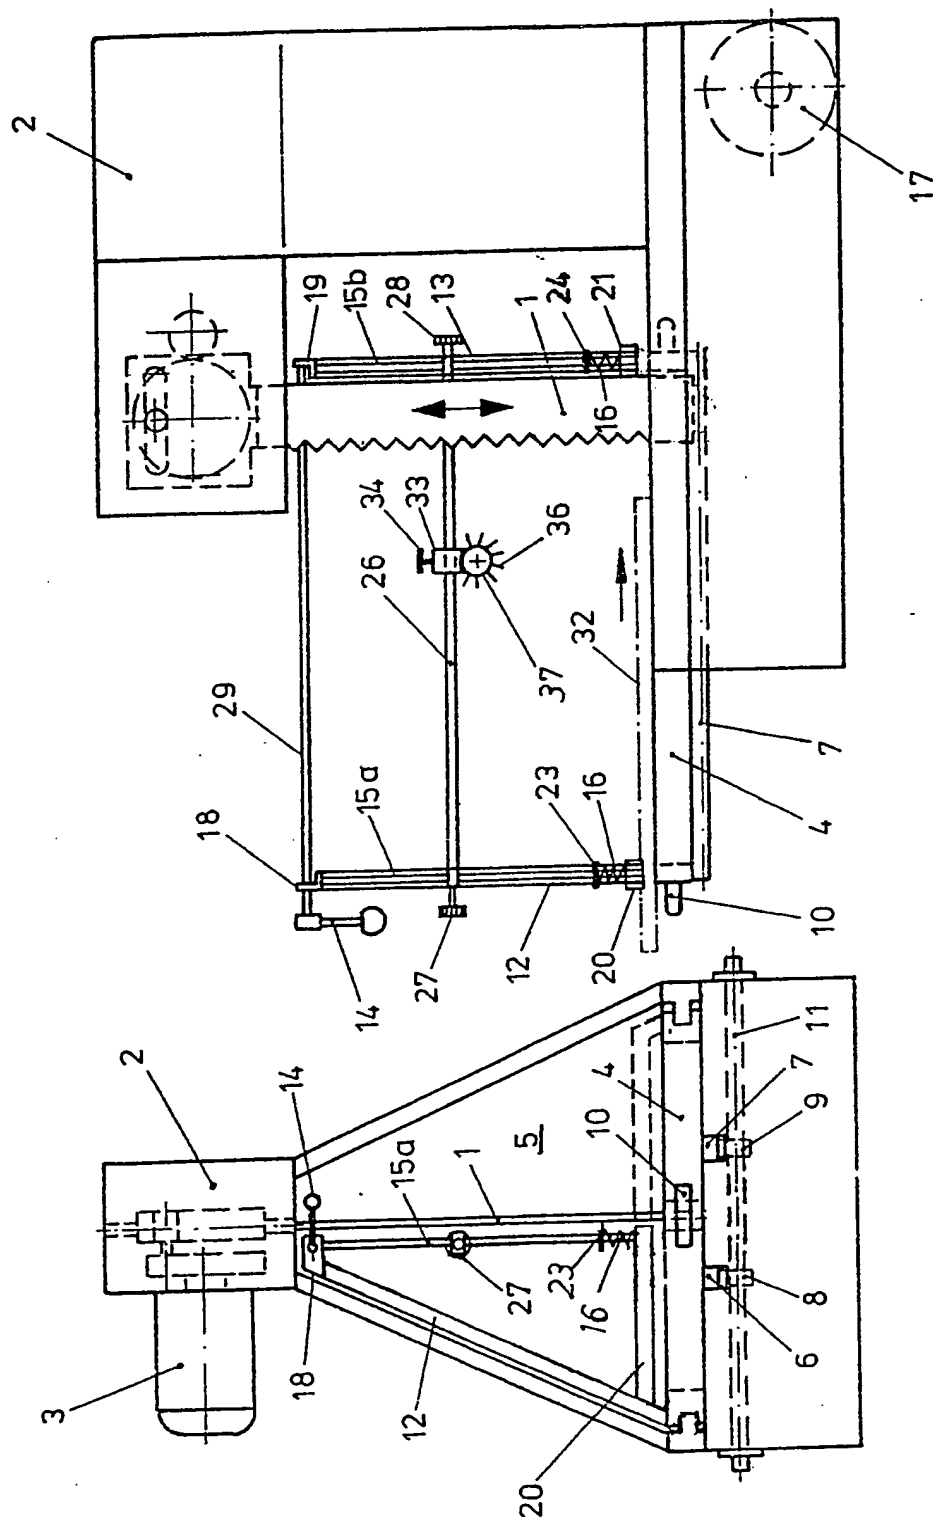


Fig. 1



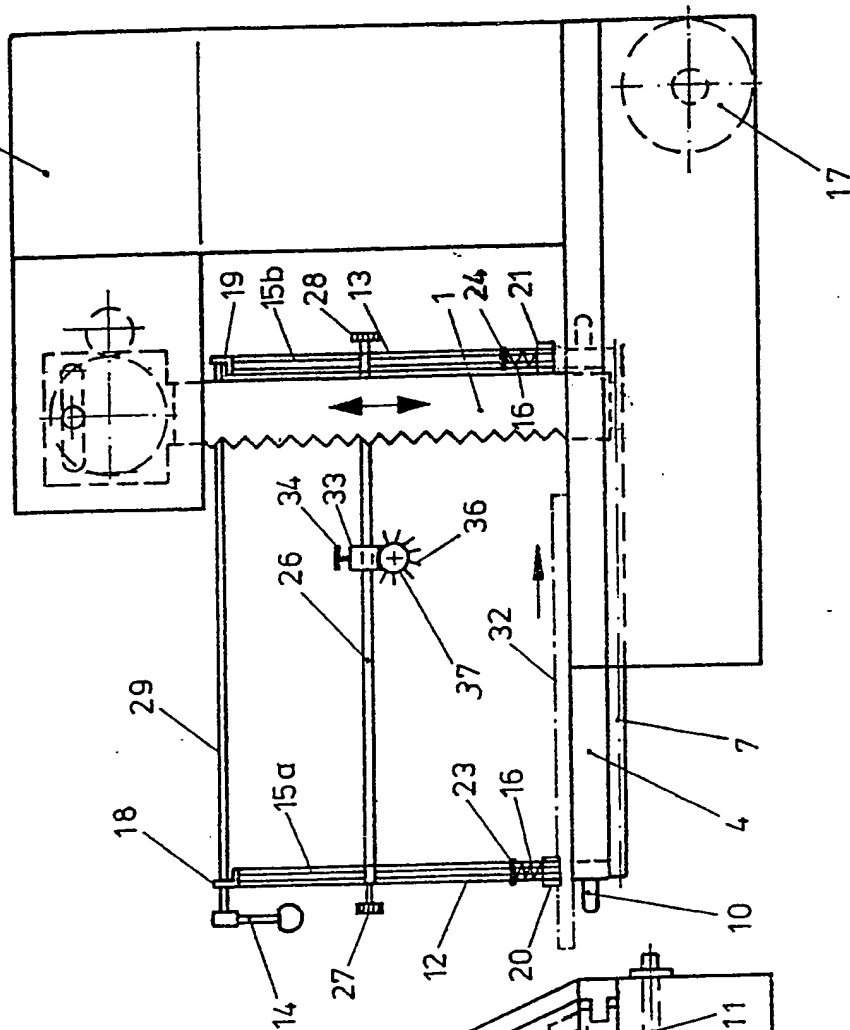


Fig. 2

2053088

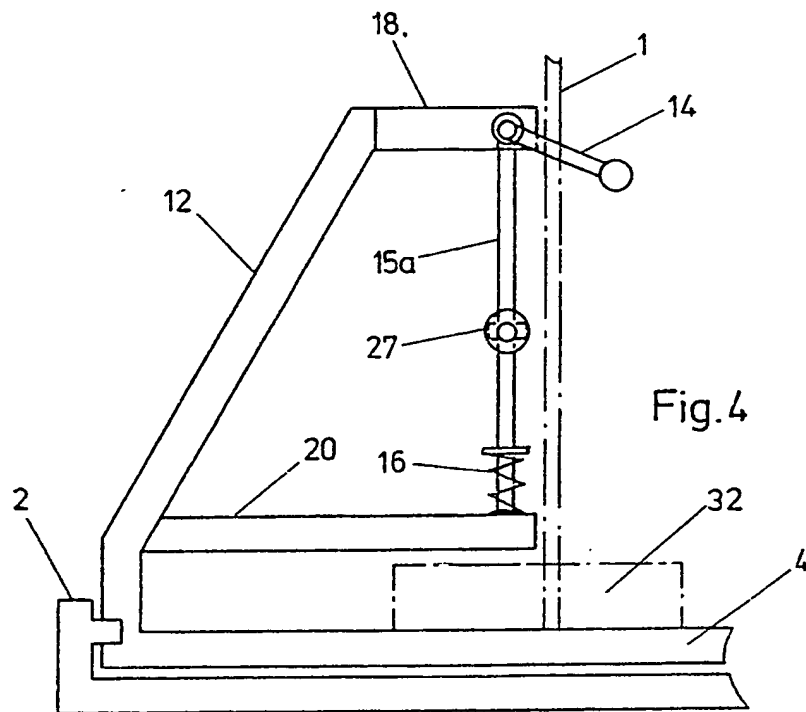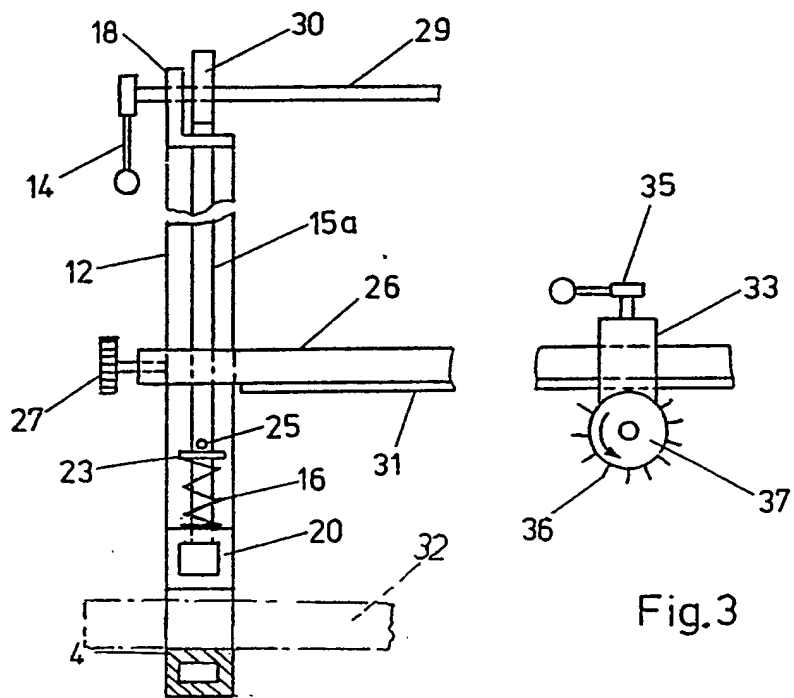

SPECIFICATION

Device for sawing materials

5 The invention relates to a device for sawing materials, especially building materials such as bricks, tiles, pipes, timber and the like.

On building sites, there is often a need for separating or reducing certain materials, or for
10 providing them with recesses, cutouts, etc. This is, for instance, often the case at corners, in the window or door area and in the ceiling and gable region, where the height, width or length of the bricks used may have to be
15 reduced. In the gable region, even angle cuts are required. In addition, there is often a need for cutting shuttering or covering boards to size, both in the longitudinal and in the transverse direction.

20 Up until now, lacking suitable equipment, bricks have been treated with a hammer and faults in the brickwork filled with chips. The result of this method was unacceptably high cold bridges, especially in the case of bricks having a layer of thermal insulation such as is
25 the subject of DE-PS 1 708 765. A further drawback of this method was the increase of materials costs it caused. Bricks which were to be reduced in size tended to become unusable; they broke in the wrong place, resulting in a large number of useless fragments.

To counteract these drawbacks, DE-GM 77 02 782 recommends a saw for brick materials. This saw is, however, only suitable for
35 bricks which are not too strong. Bricks of high strength cannot be cut with this machine. Furthermore, cutting with the saw blade, which is movable in a suitable fixing device, is a complicated and laborious process. The device is only conditionally suitable for cutting
40 other materials, such as timber. Long boards, for instance, cannot be cut longitudinally. Nor is the clamping device for the bricks to be cut stable enough to absorb major forces.

45 It is therefore an object of the present invention to provide a sawing device suitable for universal use, with which longitudinal, transverse and, if necessary, angle cuts can be made on large or long components of
50 different materials.

According to the present invention there is provided a device for sawing materials, especially building materials such as bricks, tiles, timber, pipes and the like, said device comprising a saw blade arrangement, and a supporting platform for the material to be cut which comprises a slide movable in a longitudinal direction the slide having clamping
55 means comprising at least one support towards each of front and rear ends of the slide at one side of the blade arrangement, each support being linked to an upper and lower crosspiece the lower crosspieces being arranged at a vertical distance above the slide
60 and between each pair of upper and lower

crosspieces there is arranged a longitudinal bar the bars being movable in a vertical direction and carrying a clamping arrangement.

70 The materials to be cut are simply placed on the slide and secured there by clamping. For cutting, the slide is moved in the direction of cutting. This may be done by hand operation by way of a suitable transmission, by
75 direct manual pushing of the slide or by a hydraulic or electric drive unit.

By designing the housing as a floor type unit, the saw blade being fitted to a forward extension at the top of the housing, and by
80 providing an opening in the longitudinal direction, it is possible both to cut across long boards and to feed them through longitudinally. Since the lower crosspiece is arranged at a vertical distance above the slide and the
85 two supports are fixed at the side to the front and rear parts of the slide, boards of any length can be cut. The only thing that is required is to feed in the boards longitudinally by hand, without operating the clamping device.
90 vice.

An embodiment of the present invention will now be described by way of example only with reference to the accompanying drawings, in which:—

95 *Figure 1* is a front view of the compass saw;

Figure 2 is a lateral view of the compass saw;

Figure 3 is an enlarged cutout of the clamping device (lateral view); and

Figure 4 is an enlarged cutout of the clamping device (front view).

The illustrations show a compass saw. This saw comprises a saw blade 1 mounted in an
105 upper, freely projecting end of a floor type supporting structure 2 and driven by an electric motor 3, the rotary motion of which may, if required, also drive a hydraulic pump serving some hydraulic equipment, being converted into reciprocal motion by a gearbox
110 here not illustrated in detail. The supporting structure 2 is provided with a slide 4 movable in the direction of cutting and used to feed in the material to be cut. The back end of the
115 supporting structure (behind the saw blade 1) is completely open, thereby providing an opening, through which material can be pushed. Owing to the floor type construction of the unit, there is unlimited lateral space in the area of the saw blade. As a result of the
120 above design of the supporting structure 2 and the slide 3, even long components such as boards can be placed on the slide 4 and cut.

125 For the feed movement of the slide, two racks 6 and 7 may be provided, these being arranged on the slide 4 and engaging two gears 8 and 9 mounted on a shaft 11 on the supporting structure 2. The slide 4 may, for
130 instance, be moved by hand by means of a

handle 10 arranged on the slide 4 itself, or else by way of the shaft 11 on which the gears 8 and 9 are fitted. The shaft 11 may be turned by way of a suitable linkage with a

5 handwheel or by a motor (not illustrated). Another possible alternative would be hydraulic control by means of a hydraulic cylinder.

The material to be cut is held on the slide 4 by means of a clamping device. The clamping
10 device comprises supports 12 and 13 fitted towards respective ends of the slide 4 at one side of the saw blade 1. The supports have respective upper crosspieces 18, 19 and respective lower crosspieces 20 21 the lower crosspieces 20 and 21 being arranged at a
15 vertical distance above the slide 4. This distance is so chosen as to allow the commonly used board sizes to be pushed through the gap thus created. Between the upper crosspieces 18, 19 and the respective lower crosspieces 20, 21 respective longitudinal bars 15a and 15b are arranged. The longitudinal bars 15a and 15b are capable of longitudinal
20 movement in bores provided in the crosspieces. Between each lower crosspiece 20, 21 and a respective disc 23, 24 there is a spring 16. Each disc 23, 24 is fixed to the respective longitudinal bar 15a 15b by means of a split pin 25 extending through the longitudinal bar. This arrangement ensures a resilient mounting for the longitudinal bars 15a and 15b in the crosspieces. Between the two longitudinal bars 15a and 15b, at least one clamping rail 26 is provided. The clamping
30 rail 26 is clamped to the longitudinal bars 15a and 15b by means of clamping screws 27 and 28.

Between the two upper crosspieces 18 and 19, there is further arranged a torsion bar 29
40 mounted in bores in the crosspieces. As can be seen in Fig. 3, the torsion bar 29 is provided with two cams 30, each of them being arranged directly above the upper end of a respective one of the longitudinal bars 15a, 15b. The torsion bar 29 is further provided with a handle 14.

The clamping device operates as follows: the material to be cut is placed on the slide 4. Next, the clamping rail 26 is placed on the
50 material. By tightening the clamping screws 27 and 28, the clamping rail is firmly fixed to the longitudinal bars 15a and 15b. Eccentric clamping action is initiated by means of the handle 14. When the torsion bar 29 is
55 twisted, the cams 30, together with the clamping rail 26, press the bars 15a and 15b slightly downwardly against the force of the spring 16, thus securely clamping the material. On completion of the sawing operation, the spring 16 provides automatic release of the clamping device. In order to achieve an improved clamping effect, the clamping rail 26 could suitably be provided with an resilient support, such as a rubber piece 31, on its
65 underside.

As can be seen in Figs. 3 and 4, a board 32—as indicated by a broken line—of any length required, can easily be pushed through the gap between the lower crosspieces 20, 21, and the slide 4. If this should become
70 necessary in the interests of stability, the lower crosspiece 20 or 21 can be extended beyond the centre of the slide 4 and additional support could be provided at the other
75 side of the slide 4 (indicated by a broken line in Fig. 1). Instead of a disc 23 to support the spring 26, it would of course be possible to provide a crosspin, a cam or a suitable shoulder of the longitudinal bar 15a.

80 In order to simplify the longitudinal cutting of timber, a rotatable roller 37 can be provided, which is clamped to the clamping rail 26. The roller 37 is so arranged that its axis is horizontal, extending at a right angle to the
85 cutting plane. The roller can be secured to a suitable bracket 33 and thus to the clamping rail 26 by means of a clamping screw 34 as illustrated in Fig. 2 or by an eccentric clamping device 35 as illustrated in Fig. 3.
90 If, for instance, a long timber board is to be cut lengthwise, it only becomes necessary to lower the clamping rail 26 far enough to allow the roller 37 to rest on the board 32. For this purpose, the roller may additionally
95 be equipped with a drive motor (not illustrated). In this way, the board 32 is transported automatically. This drive motor could for instance be an hydraulic drive unit connected by suitable hydraulic lines to a hydraulic
100 pump, which would preferably be driven by the motor 3. To improve the feed of the material to be cut, the circumference of the roller 37 could be fitted with teeth, serrations 36 or the like.

105 The compass saw can be moved, if necessary, by means of a pair of extendable and retractable wheels 17 mounted in the support structure 2.

The saw blade 1 comprises a basic body, on which carbide cutting tips 24 are fitted by
110 soldering, to cut during the downward stroke of the saw blade 1.

CLAIMS

115 1. A device for sawing materials, especially building materials such as bricks, tiles, timber, pipes and the like, said device comprising a saw blade arrangement, and a supporting platform for the material to be cut
120 which comprises a slide movable in a longitudinal direction, the slide having clamping means comprising at least one support towards each of front and rear ends of the slide at one side of the blade arrangement, each
125 support being linked to an upper and lower crosspiece the lower crosspieces being arranged at a vertical distance above the slide and between each pair of upper and lower crosspieces there is arranged a longitudinal
130 bar the bars being movable in a vertical

direction and carrying a clamping arrangement.

2. A device according to claim 1, wherein the saw blade arrangement is mounted in a housing of a flow type design and having an opening in the longitudinal direction through which the material is fed.

3. A device according to claim 1 or 2, wherein the clamping means is provided with at least one horizontal clamping rail extending between the longitudinal bars, the clamping rail being secured to the longitudinal bars by means of respective clamping screws.

4. A device according to claim 3, wherein the clamping arrangement comprises a torsion bar mounted between the upper crosspieces and provided with an eccentric cam above an upper end of each longitudinal bar.

5. A device according to claims 3 or 4, wherein the underside of the clamping rail is provided with a resilient support.

6. A device according to any of the preceding claims, wherein each longitudinal bar is provided with a spring extending between the lower crosspiece and a disc connected to the longitudinal bar.

7. A device according to any of the preceding claims, wherein a rotatable roller with a horizontal axis extending at a right angle to the cutting plane is fitted to the clamping rail.

8. A device according to claim 7, wherein the roller is linked to a drive motor.

9. A device according to claim 8, wherein the drive motor is an hydraulic drive unit.

10. A device according to any of claims 7 to 9, wherein the circumference of the roller is provided with teeth, serrations or the like.

11. A device according to any of claims 7 to 10, when dependent on any of claims 3 to 5, wherein the roller is secured to the clamping rail.

12. A device for sawing materials, substantially as hereinbefore described with reference to the accompanying drawings.

13. Any novel subject matter or combination including novel subject matter herein disclosed, whether or not within the scope of or relating to the same invention as any of the preceding claims.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.